



SP-8/SP-8s

Smart Illuminating Bollard

Motion Sensor / No Wiring



The revolutionary solar bollards incorporate advanced microcontroller and motion sensor for functional cost saving illumination. Ideal applications include university campuses, airports, museums, and public spaces as it provides security while accentuating landscapes.



Quantity
Project
Note
Type

General

Housing:	Extruded aluminum(low copper material)
Finish:	Black, Bronze, Platinum silver
Mounting:	Embedded, Surface mounted
Anchorage:	Anchor base with stainless steel anti-theft screws

Operational

Average Sunlight Exposure:	2~3 Hours(sunny) to 5~8 hours(overcast or rainy) to Maintain Function*
Average Operation Time:	Minimum 12 hours (extra stored power will carry over to next day)
Solar Deprivation Limit:	5 days*
Switch:	Auto photo sensor
On/Off Level:	1.5 / 3 footcandle
Temperature Range:	-40° F to 176° F
Distribution:	Narrow or Wide

*To maintain function, unit requires 2~3 hours (sunny) to 5~8 hours (overcast/rainy) of UV exposure. Extra charge will be stored for next day use. Fully charged, the unit can last 5 rainy days.


Solar LED Specification

Solar Panel:	Crystalline silicon
Lifespan of Solar Panel:	20 yrs
LED Brand:	CREE XP
Available LED colors:	White (5700K), Neutral White (4000K), Warm White (3000K)
LED Rated Life:	> 60,000 Hours (L70)
Power Storage:	Panasonic industrial battery pack (Lifespan: 4-5 years)


Warranty

3 year limited warranty. See www.meteor-lighting.com for details.

Distribution



Narrow




Wide

How To Specify

Ordering Example: SP8-30K-NSR-WD-BLK-AKE

Model	Color / CCT	Dimming	Distribution	Finish	Anchorage
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
SP8	30K 3000K	1SR 1 Sensor	NR Narrow	BLK Black	AKE Embedded
SP8s	40K 4000K	4SR 4 Sensor	WD Wide	BRZ Bronze	AKS Surface Mounted
	57K 5700K			PTS Platinum Silver	

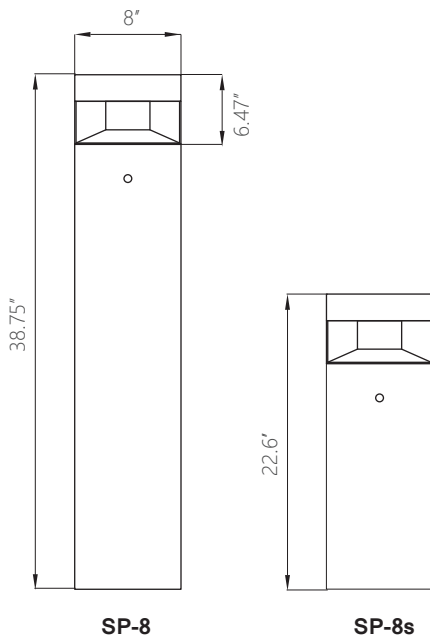

Motion Sensor Detection type

SP-8 Smart Solar Illuminating Bollard incorporates the latest infrared motion sensor. Dimming mode is set at 1/3 brightness and lights to 100% brightness for 1 minute when motion sensor is triggered. The high performance motion sensor detects abrupt changes in temperature within a 16.5ft radius. Movement within designated radius is necessary to trigger sensor to turn on.

