





# SH-200 Solar LED Ground Light

Water Proof / No Wiring

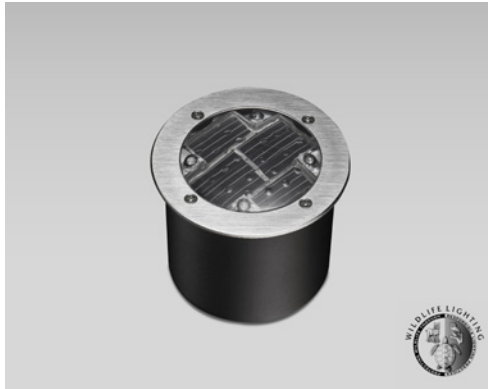

METEOR Solar LED Paver lights incorporate state-of-the-art technology, combining the best solar panels, power storage and optical design to create products that will function for years to come.



Quantity
Project
Note
Type

### General

Weight: 0.55 lbs  
 Rim Finish: Brushed/Polished stainless steel; Optional: SUS316 stainless steel / Brass  
 Lens: GE super light permeable PC  
 Housing: SUS304 stainless steel, cast aluminum  
 Power Storage: Ultracapacitor

### Operational

Operation Time: Minimum 12 hours(fully charged) 4-8 hours(overcast)  
 Full Charge Time: 6 hours(direct sunlight)  
 Switch: Light sensitive auto on/off

### Environmental

Compressive Strength: 2541 lbs/1153 kgs(minimum)  
 Operating Temperature: -4° F-140° F  
 Storage Temperature: -13° F-176° F

### Warranty

3 year limited warranty. See [www.meteor-lighting.com](http://www.meteor-lighting.com) for details.



## How To Specify

### Ordering Example: SH200C-AMB-PS-HS

Model	LED Color	Rim Finish	Housing
<input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>
<b>SH200C</b> Product	<b>AMB</b> Amber	<b>BS</b> Brushed Stainless Steel	<b>HS</b> Housing and Anchor Plate Included
<b>SH200B</b> Battery sample	<b>BLU</b> Blue	<b>PS</b> Polished Stainless Steel	<b>NH</b> Without Housing and Anchor Plate
	<b>GEN</b> Green	<b>SS</b> SUS316 Stainless Steel	
	<b>RED</b> Red	<b>BR</b> Brass	
	<b>WHT</b> White		
	<b>WAM</b> Warm white		

*Color	LUX(Average)
White	25
Amber	25
Red	50
Blue	20
Green	55
Warm White	25