





SH-260 Solar LED Ground Light

Water Proof / No Wiring

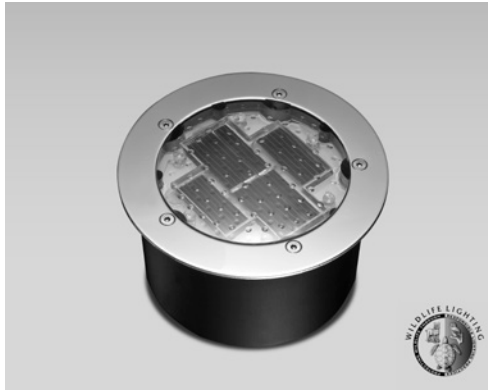

METEOR Solar LED Paver lights incorporate state-of-the-art technology, combining the best solar panels, power storage and optical design to create products that will function for years to come.



Quantity
Project
Note
Type

General

Weight: 1.28 lbs
 Rim Finish: Brushed/Polished stainless steel; Optional: SUS316 stainless steel / Brass
 Lens: GE super light permeable PC
 Housing: SUS304 stainless steel, cast aluminum
 Power Storage: Ultracapacitor

Operational

Operation Time: Minimum 12 hours(fully charged) 4-8 hours(overcast)
 Full Charge Time: 6 hours(direct sunlight)
 Switch: Light sensitive auto on/off

Environmental

Compressive Strength: 2818 lbs/1281 kgs(minimum)
 Operating Temperature: -4° F-140° F
 Storage Temperature: -40° F-176° F

Warranty

3 year limited warranty. See www.meteor-lighting.com for details.



How To Specify

Ordering Example: SH260C-BLU-BS-HS

Model	LED Color	Rim Finish	Housing
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
SH260C Product	AMB Amber	BS Brushed Stainless Steel	HS Housing and Anchor Plate Included
SH260B Battery sample	BLU Blue	PS Polished Stainless Steel	NH Without Housing and Anchor Plate
	GEN Green	SS SUS316 Stainless Steel	
	RED Red	BR Brass	
	WHT White		
	WAM Warm White		

*Color	LUX(Average)
White	40
Amber	40
Red	65
Blue	45
Green	80
Warm White	40