




SH-130 Solar LED Paver Light

Water Proof / No Wiring



METEOR Solar LED Paver lights incorporate state-of-the-art technology, combining the best solar panels, power storage and optical design to create products that will function for years to come.

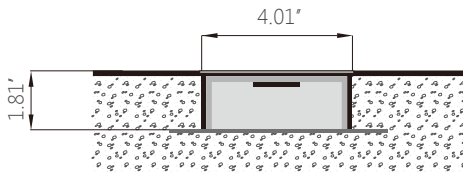

Quantity
Project
Note
Type

General

Weight: 0.968 lbs
 Rim Finish: Brushed/Polished stainless steel; Optional: SUS316 stainless steel / Brass
 Lens: GE super light permeable PC
 Housing: SUS304 stainless steel, cast aluminum
 Power Storage: Ultracapacitor

Operational

Operation Time: Minimum 12 hours (fully charged) 4-8 hours (overcast)
 Full Charge Time: 6 hours (direct sunlight)
 Switch: Light sensitive auto on/off

Environmental

Compressive Strength: 9902 lbs/4456 kgs (minimum)
 Operating Temperature: -4° F-140° F
 Storage Temperature: -13° F-176° F

Warranty

3 year limited warranty. See www.meteor-lighting.com for details.



How To Specify

Ordering Example: SH130C-AMB-PS-HS

Model	LED Color	Rim Finish	Housing
<input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>
SH130C Product	AMB Amber	BS Brushed Stainless Steel	HS Housing and Anchor Plate Included
SH130B Battery sample	BLU Blue	PS Polished Stainless Steel	NH Without Housing and Anchor Plate
	GEN Green	SS SUS316 Stainless Steel	
	RED Red	BR Brass	
	WHT White		
	WAM Warm White		

*Color	LUX(Average)
White	30
Amber	25
Red	70
Blue	25
Green	60
Warm White	28